

FlexxCNC™



“

*“In under half a day, the FlexxCNC enabled me to connect my UR to my CNC machine so I can execute g-code and all peripheral control from my robot using polyscope.”*

- Tim Cheney Jr - RDS Machine

# FlexxCNC™: UR to CNC Communication Interface

Integrate your Universal Robot onto any machine in your shop before lunch. Ensure once your new cobot hits your loading dock you'll have it cutting chips that week.

Compatible with:

OKUMA

FANUC

HAAS

Mazak

DMG MORI


brother

MITSUBISHI

Run your machine tending operations lights out



Standardize the solution across your shop

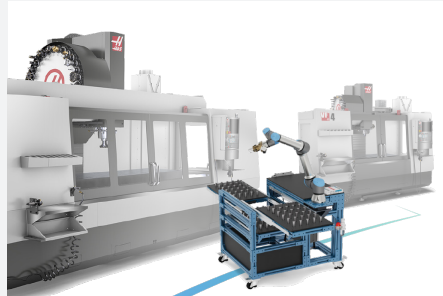

Streamline with machinists in mind



## Specifications:

Power	120-220V AC
Mounting	M6 mounting holes
Dimensions	10" x 8" x 6"
I/O	DIO at 24V (Relay provided for non 24V integrators)
CNC Compatibility	Haas, Mazak, Fanuc, Okuma, Brother, Mitsubishi, DMG Mori & Serial
Robot Compatibility	CB3 and E-Series
Connectors	(12) M12 DIO connectors, 1 USB, 2 Ethernet port, 1 Power entry module



Contact us at [Sales@Flexxbotics.com](mailto:Sales@Flexxbotics.com) to learn more